


Signature Center (HFC) Mounting Guide

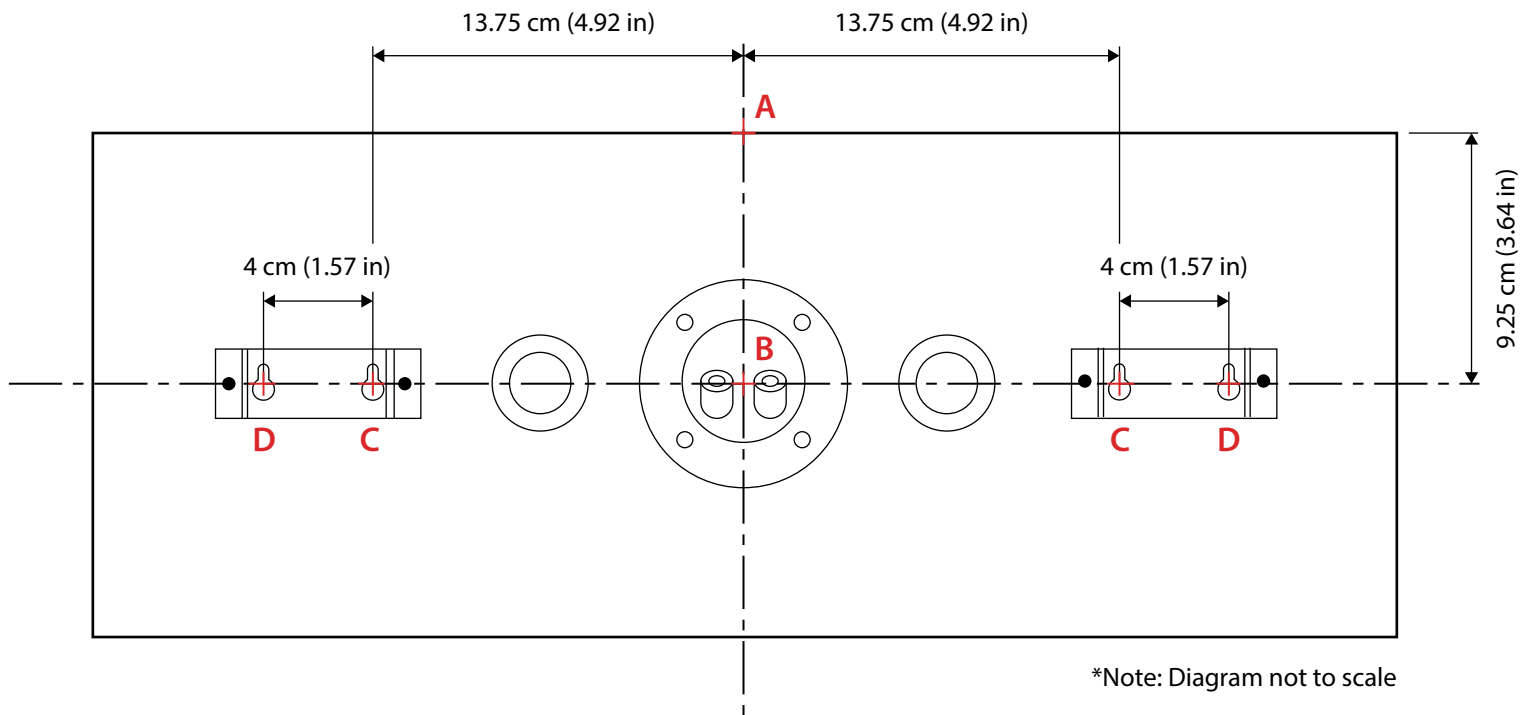

We recommend anchoring your speakers by mounting them to a stud. A stud finder can be used to easily locate them. Most homes are built with 16" (40.6 cm) on-center studs, which means there should be a stud every 16" (40.6 cm). If you have trouble finding studs on a wall, verify how far apart they are in the home by locating and measuring them on another wall. If a stud is not available, drywall anchors must be used.

Mounting Steps

1. Place speaker in desired location and mark top edge (A).
2. Measure 9.25 cm (3.64 inches) down from the center of the top edge and mark the spot (B).
3. Measure 13.75 cm (4.92 inches) from that spot in each horizontal direction and mark (C). (Tip: It is best to use a level to ensure all marks are aligned and level)
4. Measure 4 cm (1.57 inches) out from those spots and mark the final holes (D).
5. Install screws in both sets of the C and D marks.
6. Hang the speaker mount brackets on the screws and ensure the speaker is secure.

If you require assistance, please do not hesitate to contact us at: www.fluance.com/support